WRC124XHD

WELDED STEEL CHAIN > Welded Steel Chain - Straight Sidebar

Industry: *Grain Processing, Forest Products*

"C-type" straight sidebar chain has the same general characteristics as offset sidebar construction. It is recommended for reversable conveyors and allows for the easiest in-field attachment welding.

- All pins are through-hardened
- 1" & larger pins are further induction hardened
- Pre-Greased Rivets available upon request on all sizes

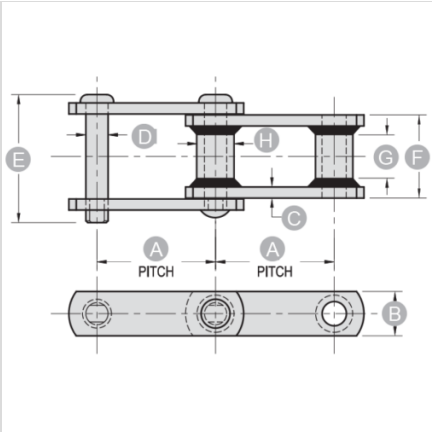

NOTE: All dimensions shown in inches unless noted otherwise. *WHC denotes Heat-Treated

Part Number	Average Pitch	Ultimate Strength (lbs)	WH* Ultimate Strength (lbs)	Sidebar Height	Sidebar Thickness	Pin Diameter
	A			B	C	D
WRC124XHD	4.050	85,500	122,700	2.000	1/2	1.000

Part Number	Approx. Overall Width	Length of Bearing	Max. Sprocket Thickness	Barrel O.D.	Links per Foot	Average Weight per Ft. (lbs)
	E	F	G	H		
WRC124XHD	4 7/8	3.000	1 1/2	1.660	3.000	14.500

Questions about ordering? Call us!